

# Invetex Small BizPak Kit

**\$995.00**

+ Tax and Shipping

**Water leaks are the second leading cause of network failure. How much is network uptime worth to you?**



Provide your network high level detection of water leaks and temperature extremes by installing our Halotiles in suspended or dropped ceilings directly above your network equipment to provide early warning capabilities through e-mail and local alarm systems.


- 144 water sensing cups for maximum coverage!
- Halotiles are modular and installation is simple.
- The IMS500 offers both contact closure for alarm system interface and USB for computer interface.
- The Haloclips can be simply clipped on the ceiling grid for a visual alert on the affected area ceiling tile from inside the room.
- Adjustable temperature settings and alert notifications can be set through your computer.



Halotiles are 2 foot by 2 foot foam mats that sense water above your network equipment. The IMS 500 monitor will send you email and SMS text messages when water is detected on any tile, or temperature is out-of-range above drop ceilings letting you know that there is a problem before it becomes a disaster.



# Invetex Monitoring Systems (IMS)

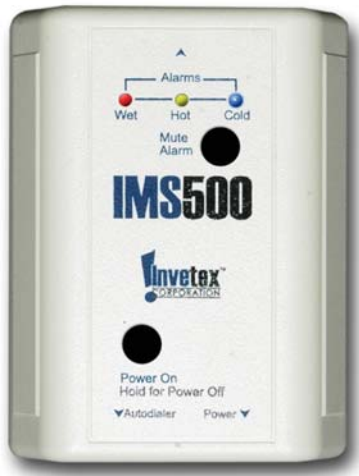

Each Halotile offers both water and temperature sensors. The IMS500 monitor communicates with each tile and reports water or out-of-temperature limits by a local audible alarm, email or SMS text messages, or contact closure (interface with existing alarm systems).

**Interface Capabilities:** Independent contact closure to interface with existing alarm systems and optional auto dialer. The IMS500 have an RS232/USB interface.

**IMS500** monitors up to 40 Halotiles.

If the system requirements expand beyond 40 halotiles, the IMS. 500 can be upgraded to the IMS 2000 which has the capabilities to monitor up to 200 Halotiles. (Visit [www.invetex.com](http://www.invetex.com) for more information)

**Distributed By:**



## Specifications:

**Power Source:** Universal AC Wall Power Supply, 5 VDC @ 1.0 amp , UL Listed

**Temperature Range settings:** 32 to 140 ° F adjustment range

## Dimensions (inches):

IMS 500 (3.8" width / 1.51" depth /5.004" length)

## Weight:

IMS 500 - 9 oz

**Mounting:** Wall or Flat Surface

**Case Material:** Flame Retardant ABS

**Color:** Bone/Blue

**Warranty:** 2 Year (Factory)

Invetex Monitor System Capabilities	IMS500
Manual On/Off	●
Temperature Monitoring Above Tile Capabilities	●
Temperature - Adjustable Control Settings	●
Computer Interface RS -232/USB	●
Central Alarm / Contact Closure Compatible	●
Visible and Audible Local Alarm	●
Detect And Identify Leaks -Tile Specific	●
Time / Date Stamp	●
Internal Diagnostics/Error Detection	●
Monitoring - Coverage Area (2X2 Tile) up to 160 sq.ft	



[www.invetex.com](http://www.invetex.com)  
Toll Free: 866.582.5029